

HUNTONIT

PREPAINTED WALLS AND CEILINGS

B-24 04.14



NEW COLORS AND SURFACES



ASTMA- OG
ALLERGI FORBUNDET
- gjør Norge friskere




member of

BYGGMA
group

Huntonit panels with natural wood fiber core are the only pre painted panels recommended by Norwegian Asthma and Allergy Association. The panels are rated highest class (M1) in finish indoor climate test and awarded with danish "Indoor Climate Label".

The panels do not exhaust any gas or harmful smells and consists of nothing but natural wood fibers.

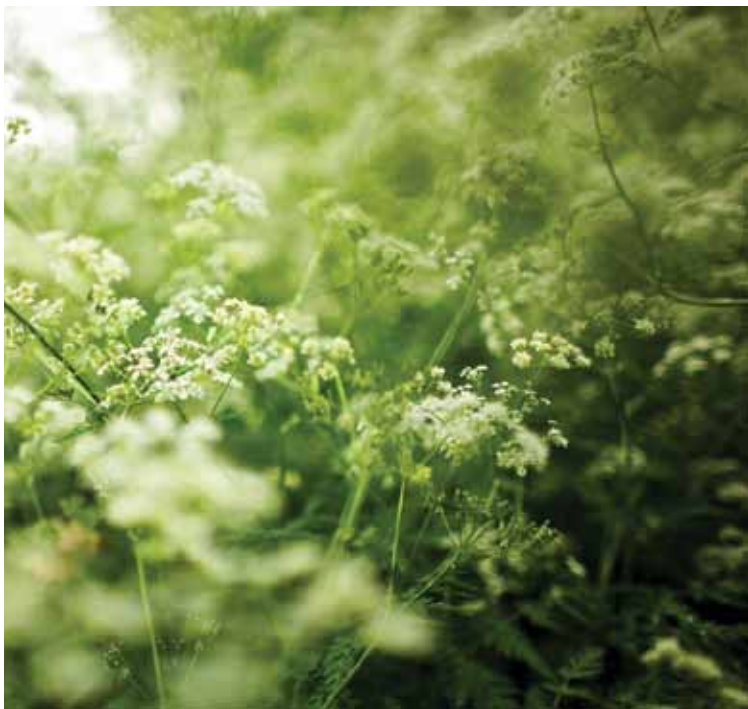


PRODUCT FACT

Huntonit pre painted wall and ceiling panels are produced in Norway with nothing but pure natural wood fibers. The fibers are compressed and fused together in a heat and wather process with no additive substance. The panels are treated with five coats of environmentally friendly watherbased acrylic paint. Finishing layer is a protective coating.

The panel has a fire- (class K10 D-s2,d0) and sound-absorbing effect (sound diminishing cladding). Technically approved by SINTEF and may be used in REI30- and REI60- structures.

In addition, the panels are dense, making it possible to install screw fixed bookshelves and lamps directly on to the panels.

AVAILABLE panel profile



GLAZED
releases the tree-structure through

BRUSH PAINTED
patented surface of brush strokes



WOOD
solid color and wooden structure

CONCRETE
unique surface similar to rough concrete

AVAILABLE surface



Huntonit Wood Wall Lasert color Cappuccino



HUNTONIT BASIC AND TEXTURE

Huntonit wall- and ceilingpanel range may be divided into two types; **BASIC** consist of wall and ceiling panel with brush painted or prepainted surface. **TEXTURE** range has a more textured surface.

- Patented brush painted surface
- Recommended by the Norwegian Asthma and Allergy Association
- Elegant and stylish “one, two, three”
- A pure natural product that contributes to a healthy indoor climate
- May be used in most indoor rooms
- Fit many styles from classic and traditional to the more minimalist and industrial
- Easy to repaint with acrylic paint
- Durable and easy care - easy to clean
- Available in 2 pack - easy to carry! (Elegance, Royal og Brannit is delivered in 4 pc)



HUNTONIT BASIC

Wall- and ceiling panels in traditional style with roller painted or patented brush painted surface. Smooth texture provides a good base for beautiful, functional rooms.



ASTMA- OG
ALLERGIFORBUNDET
- gjør Norge friskere





BRUSH PAINTED **SKYGGE WALL PANEL**

Huntonit brush painted wallpanel in Skygge profile is suitable for anyone who wants an classical and timeless look.

Beautiful brush painted surface, light colors and the natural wood fiber core makes Shadow panel a choice for the future.

Available in 2 pack for your convenience.

The panel have five boards, each 120 mm wide. Tongue and groove allows quick and easy installation with concealed nailing. Mount on existing wall or directly on to stud.

SKYGGE PROFILE




Skygge White	11 x 600/620 x 2390 mm	Art nr 231850
Skygge White*	11 x 600/620 x 2740 mm	Art nr 231860
Skygge Caffelatte	11 x 600/620 x 2390 mm	Art nr 231852
Skygge Caffelatte*	11 x 600/620 x 2740 mm	Art nr 231862
Skygge Frost	11 x 600/620 x 2390 mm	Art nr 231855
Skygge Frost*	11 x 600/620 x 2740 mm	Art nr 231865

* must be ordered






*Colors
available
in Shadow*

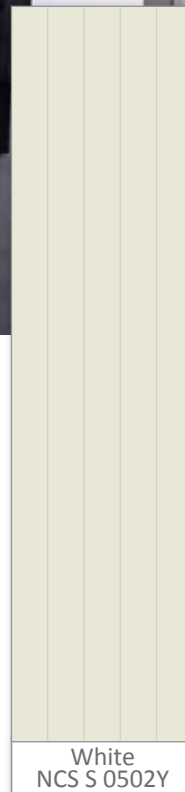

White
NCS S 0502Y



Caffelatte
NCS S 1005-Y30R

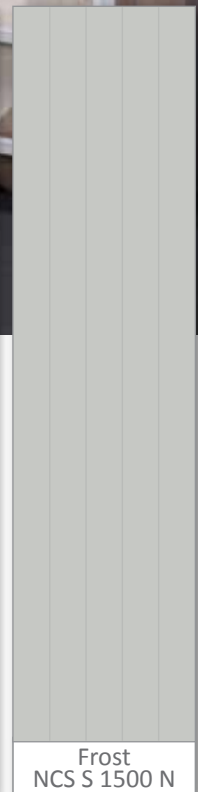

Frost
NCS S 1500 N

BRUSH PAINTED **SKYGGE WALL PANEL**

Huntonit Skygge panel is also available in four wonderful colors.
Combined the colors with Huntonit Shadow in White, Caffelatte or Frost.
Try also Huntonit Single Panel Board.

Huntonit panel with natural wood fiber core is the only pre painted panel
recommended by Norwegian Asthma and Allergy Association.

SKYGGE PROFILE




Skygge Azur	11 x 600/620 x 2390 mm	Art nr: 231881
Skygge Purple	11 x 600/620 x 2390 mm	Art nr: 231883
Skygge Olive	11 x 600/620 x 2390 mm	Art nr: 231885
Skygge Pepper	11 x 600/620 x 2390 mm	Art nr: 231887




*Colors
available
in Shadow*




Azur
NCS S 4040-B

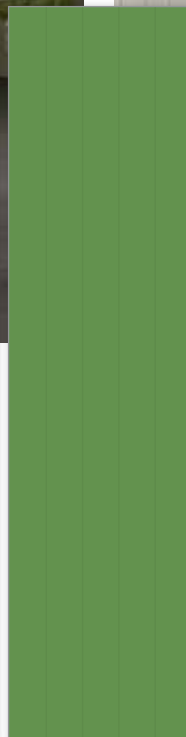

Olive
NCS S 3040-G50Y

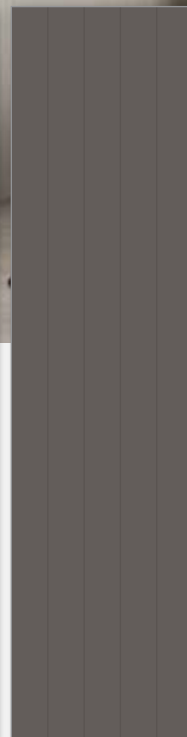

Pepper
NCS S 6502-Y

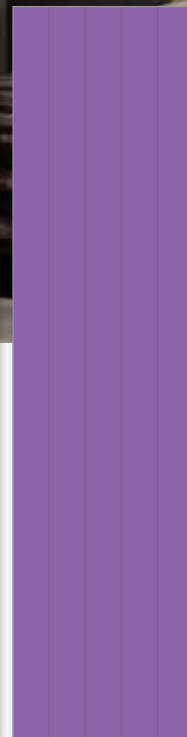


Purple
RAL 4001

Huntonit Perle Frost and Huntonit Design wall Antikk Wood*




*Colors
available
in Pearl*


Huntonit Perle Caffelatte

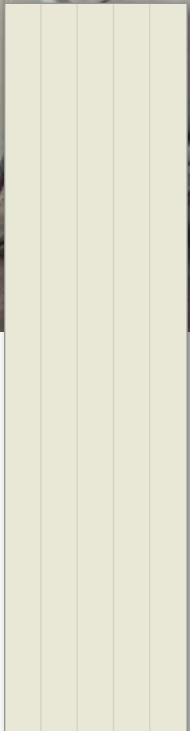

White
NCS S 0502Y

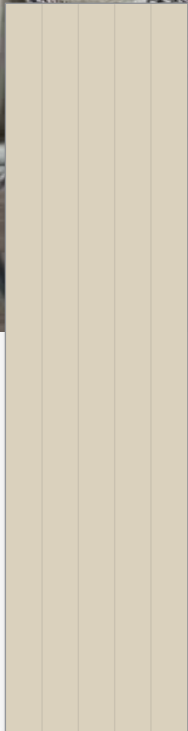

Caffelatte
NCS S 1005-Y30R

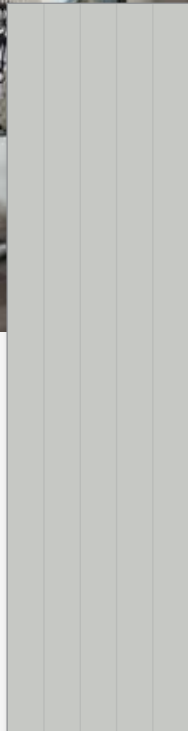

Frost
NCS S 1500 N



BRUSH PAINTED

PERLE WALL PANEL

Huntonit pre painted panels with Perle profile; a classick and elegant appearance for your walls.

Brush painted surface, light and timeless colors, 2 pack and the natural and pure core material provides you will be satisfied with for years to come.

The panel consist of 5 boards; each 120 mm wide. The panel has tongue and groove and is very easy and quick to install with concealed nailing, either on an existing wall or directly on to stud. Huntonit wallpanel with smooth prepainted surface is durable and easy to clean.

*see brochure Huntonit Design.

PERLE PROFILE



Perle White	11 x 600/620 x 2390 mm	Art nr: 231750
Perle White*	11 x 600/620 x 2740 mm	Art nr: 231760
Perle Caffelatte	11 x 600/620 x 2390 mm	Art nr: 231752
Perle Caffelatte*	11 x 600/620 x 2740 mm	Art nr: 231762
Perle Frost	11 x 600/620 x 2390 mm	Art nr: 231755
Perle Frost*	11 x 600/620 x 2740 mm	Art nr: 231765

*must be ordered

Huntonit Panelbord White i tak and Wood Panelbord Shadow på vegg



*Colors
available in
Panelbord*

White
S 0502Y



BRUSH PAINTED **SINGLE PANEL BOARD**

Huntonit panel board with brush painted surface may be used vertically and horizontally on the wall or ceiling. Same durable surface as the rest of Huntonit products. Short side extension with V-fas provides a clean appearance where panels need to be spliced for maximum coverage beyond 2400mm.

Huntonit single panel board is the only pre painted panel board recommended by the Norwegian Asthma- and Allergy association.

LONG SIDE EXTENSION IN SKYGGE PROFILE



Panel board White (netto:11x180x2400) 11x200x2420 mm

Art nr 231621





BRUSH PAINTED

ANTIKK WALL WITH MICROJOINT

Huntonit Antikk with microjoint; a wall panel with discrete joint and without milled boards. The Microjoint gives the panels a minimal joint. the surface is strong and brush painted.

Antikk White	11 x 600/620 x 2390 mm	Art nr: 233130
Antikk White	11 x 600/620 x 2740 mm	Art nr: 233131

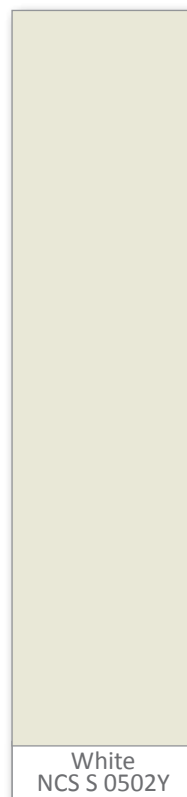

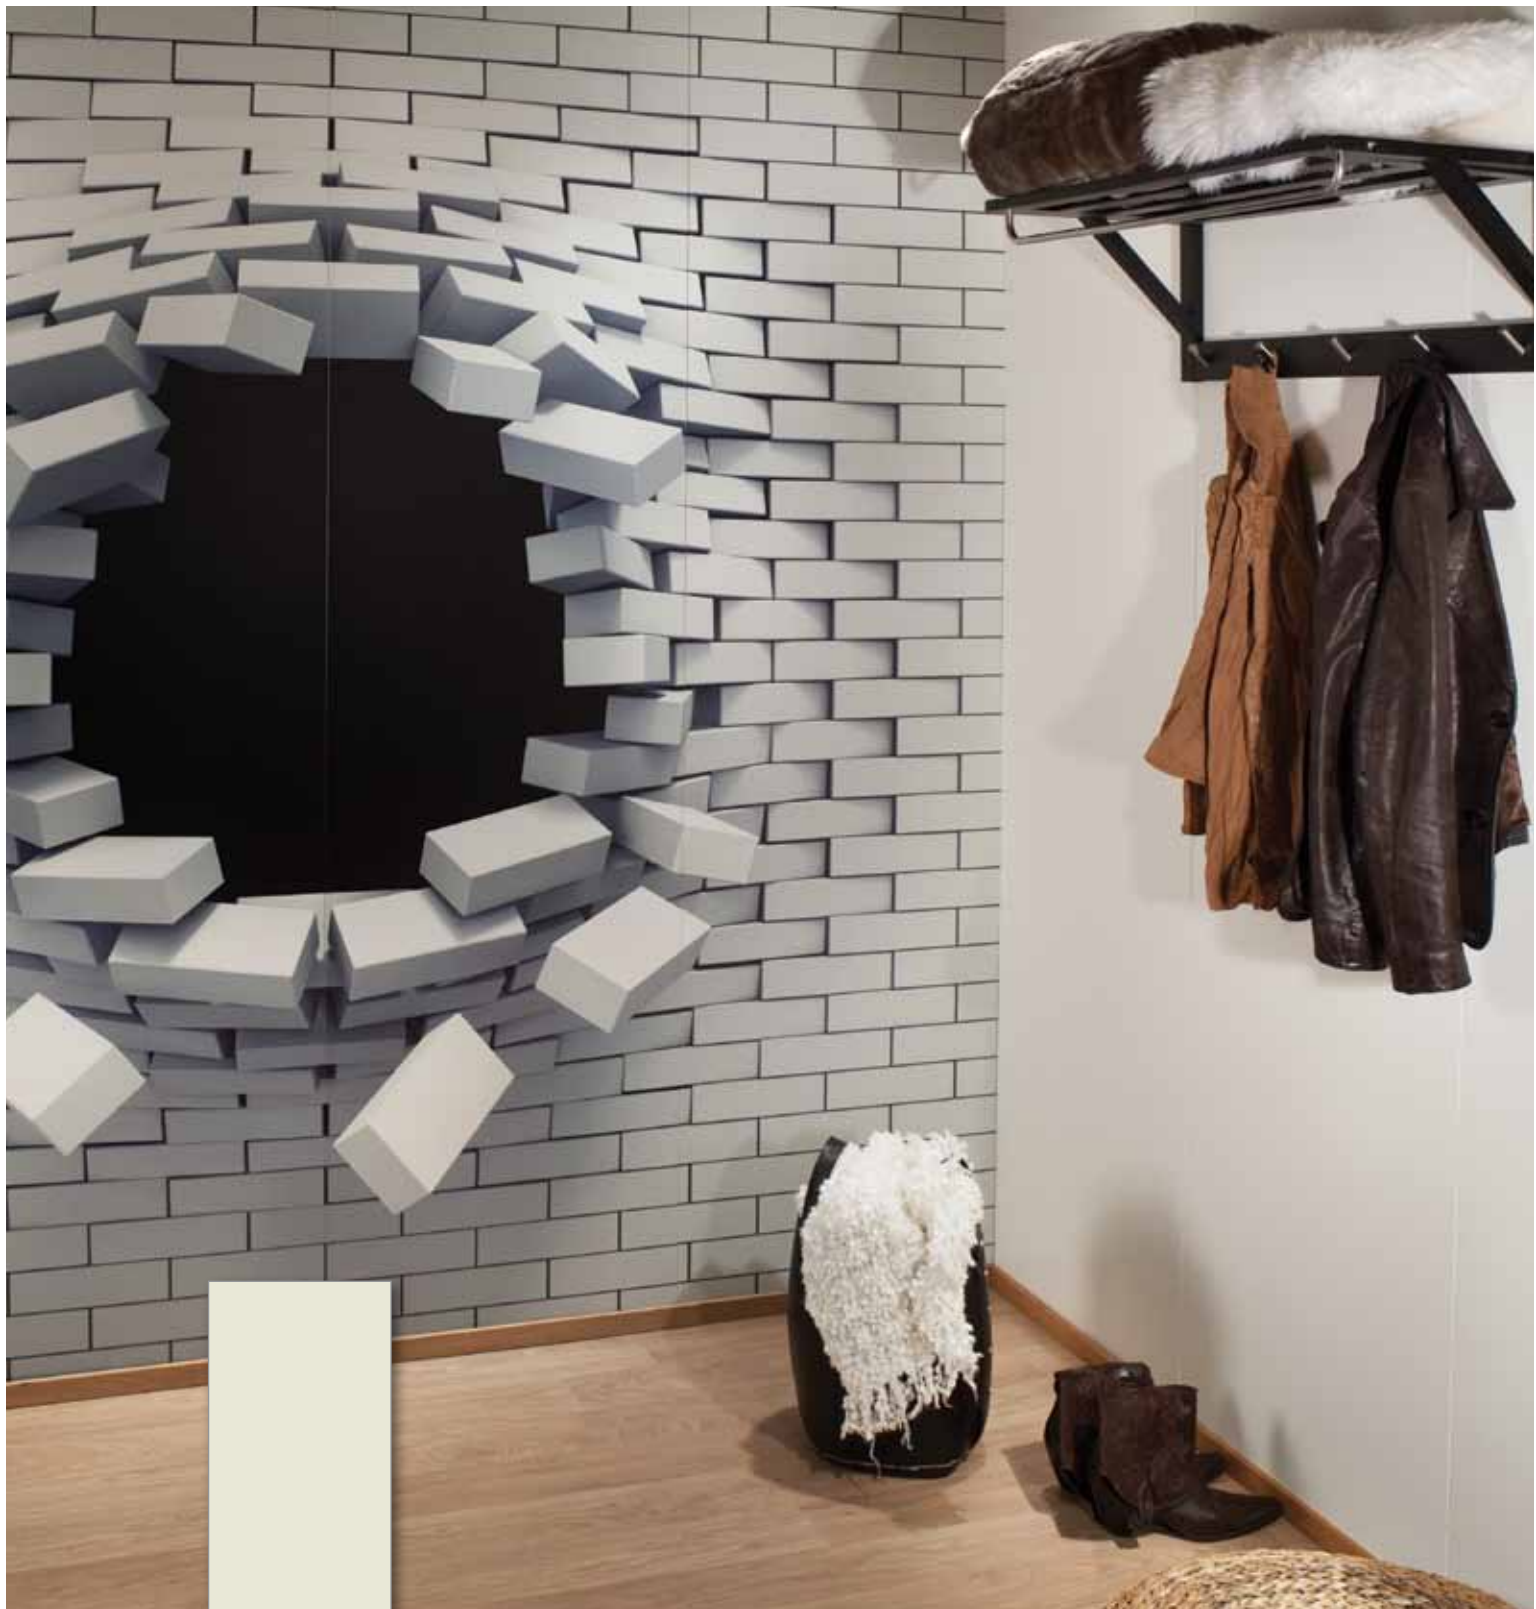

Huntonit Designvegg Hole in Wall* and Huntonit Antikk wall panel.
*see brochure Huntonit Design

PAINTED ANTIKK WALL PANEL

Huntonit Antikk wallpanel without milled board, just v-fuge between panels. Smooth roll painted surface.

LONG SIDE EXTENSION
IN V-FAS PROFILE



White
NCS S 0502Y

Antikk White
Antikk White

11 x 600/620 x 2390 mm
11 x 600/620 x 2740 mm

Art nr:
Art nr:



Huntonit Faspanel 8 bord White



BRUSH PAINTET

FASPANEL 8 BORD

Huntonit kostemalt panelplate type Faspanel 8 bord

har et nostalgisk, stilfullt og elegant utseende.

Delivered in 2 pack.

The panel consist of eight boards, each 75mm wide.

The panel has tongue and groove and is very easy and quick to install with concealed nailing, either on an existing wall or directly on to stud.


Huntonit wallpanel with smooth prepainted surface is durable and easy to clean. Repaint with acrylic paint when time to redecorate.

V-FAS PROFILE



Faspanel 8 bord White	11 x 600/620 x 2390 mm	Art nr: 233381
Faspanel 8 bord White*	11 x 600/620 x 2740 mm	Art nr: 233391
Faspanel 8 bord Caffelatte	11 x 600/620 x 2390 mm	Art nr: 233382
Faspanel 8 bord Caffelatte*	11 x 600/620 x 2740 mm	Art nr: 233392
Faspanel 8 bord Frost	11 x 600/620 x 2390 mm	Art nr: 233385
Faspanel 8 bord Frost*	11 x 600/620 x 2740 mm	Art nr: 233395

*must be ordered

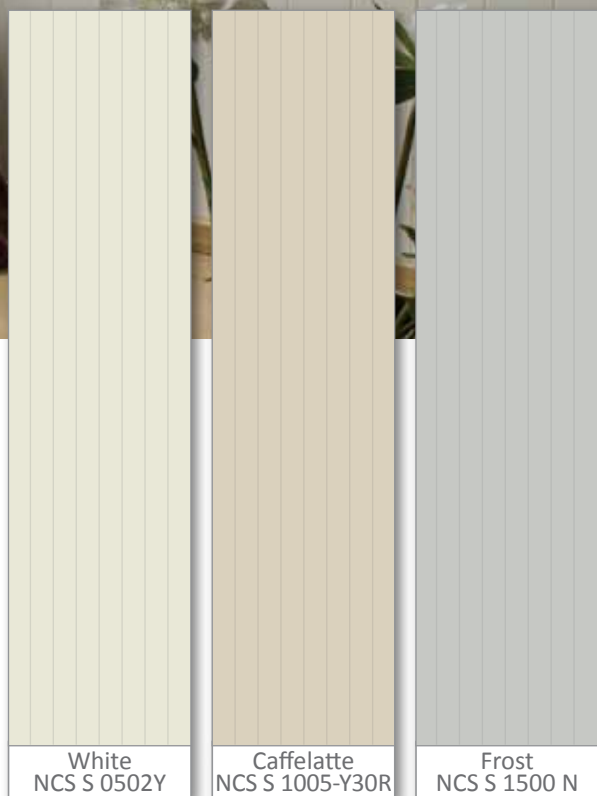

White
NCS S 0502Y

Caffelatte
NCS S 1005-Y30R

Frost
NCS S 1500 N

*Colors
available in
Fas 8 bord*

BRUSH PAINTED FASPANEL 6 BORD

Huntonit brush painted wall panel type
Faspanel 6 bord has a nostalgic, stylish and elegant look.
Delivered in 2 pack.


The panel consist of six boards, each 100mm wide.
The panel has tongue and groove and is very easy and quick
to install with concealed nailing, either on an existing wall or
directly on to stud.

Huntonit wallpanel with smooth prepainted
surface is durable and easy to clean.

V-FAS PROFILE




Faspanel 6 bord White 11 x 600/620 x 2390 mm Art nr: 233450
Faspanel 6 bord White 11 x 600/620 x 2740 mm Art nr: 233460

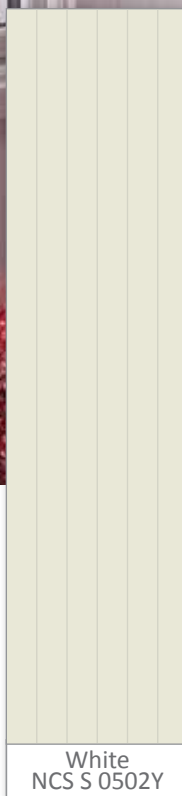

White
NCS S 0502Y



Huntonit Faspanel 3 bord White and brush painted Panelbord ceiling

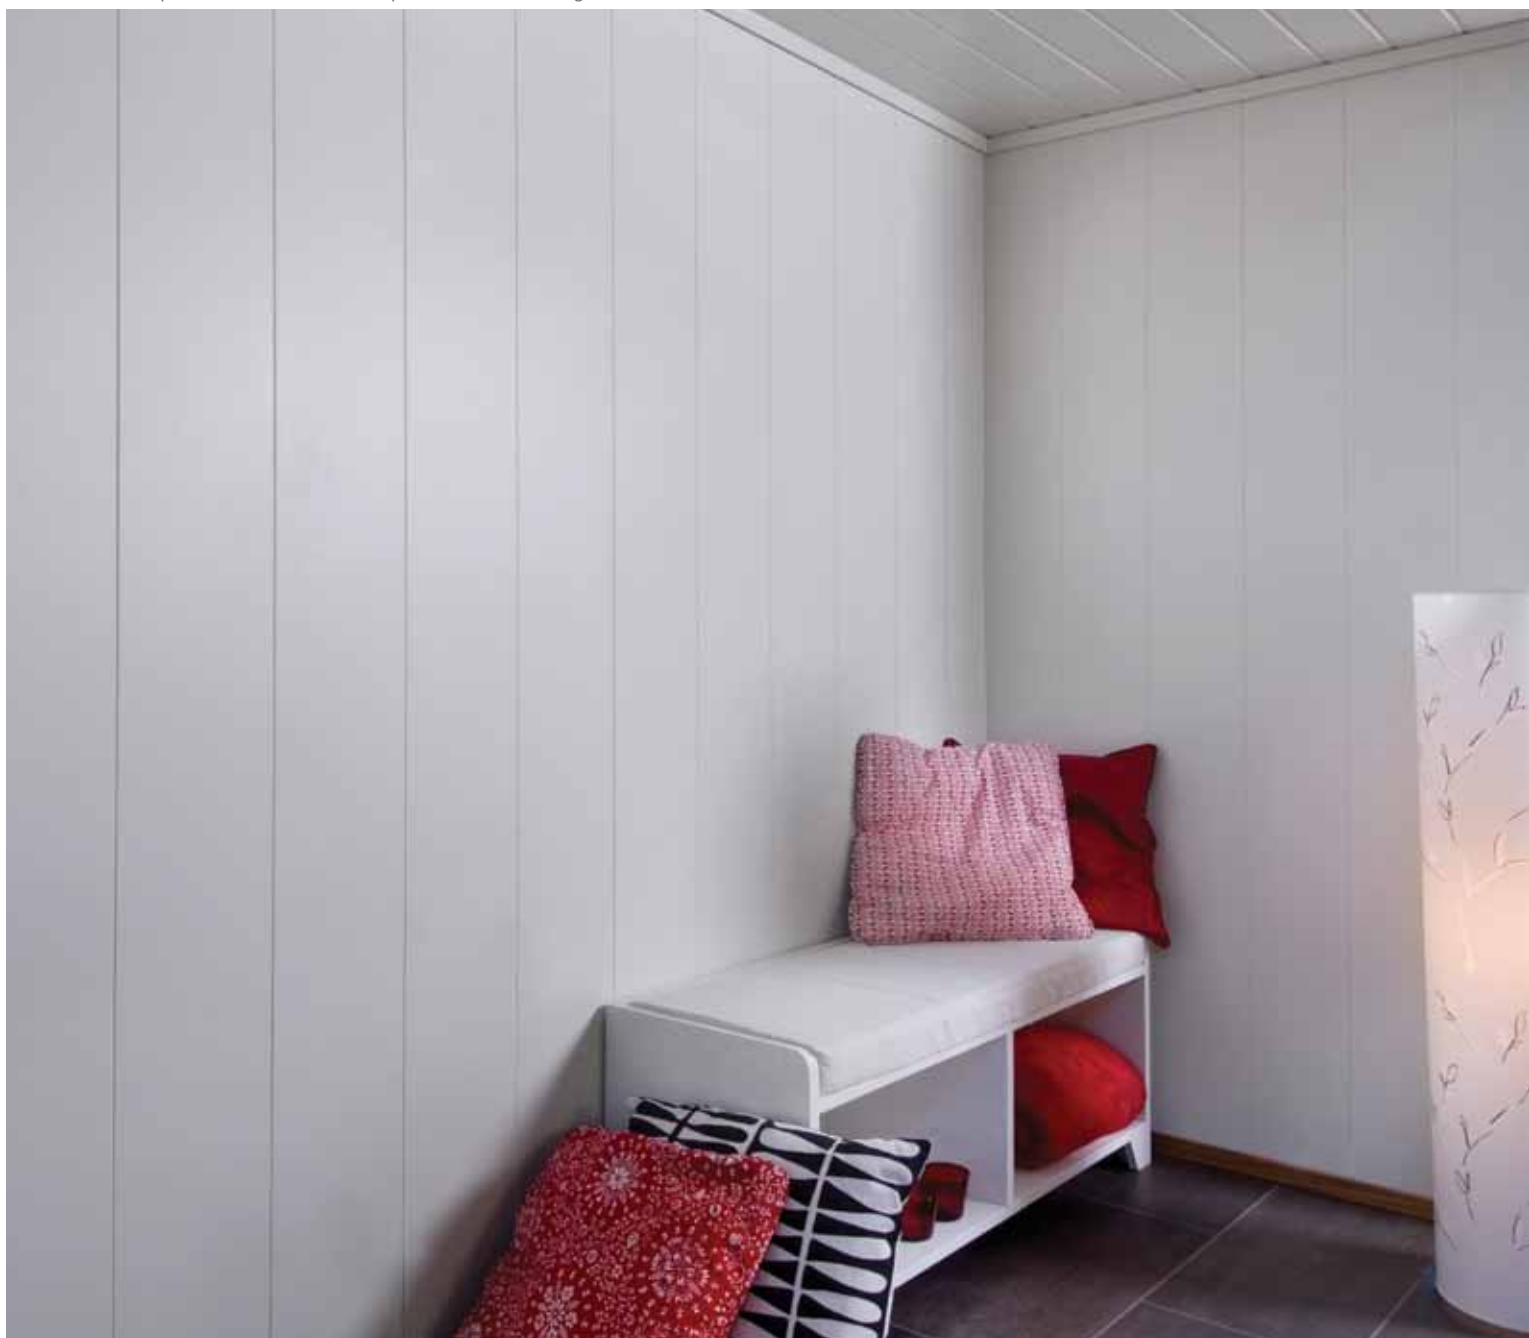

Faspanel 3 bord White	11 x 600/620 x 2390 mm	Art nr:
Faspanel 3 bord White*	11 x 600/620 x 2740 mm	Art nr:
Faspanel 3 bord Caffelatte	11 x 600/620 x 2390 mm	Art nr:
Faspanel 3 bord Caffelatte*	11 x 600/620 x 2740 mm	Art nr:

*must be ordered

PAINTED FASPANEL 3 BORD

Huntonit pretrained Faspanel 3 board with a classic, stylish and elegant look.


The panels consist of three boards, each 200mm wide. The panel has tongue and groove and is very easy and quick to install with concealed nailing, either on an existing wall or directly on to stud.

Huntonit wallpanel with smooth pretrained surface is durable and easy to clean.


V-FAS PROFILE



*Colors available
in Fas 3 bord*

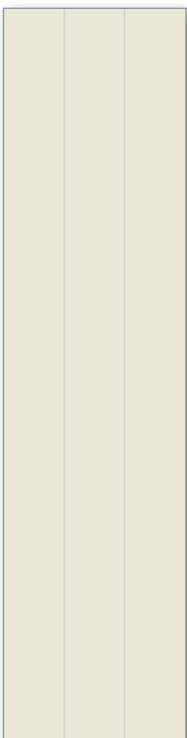

White
NCS S 0502Y

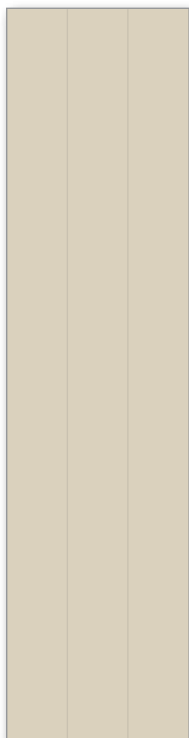

Caffelatte
NCS S 1005-Y30R



Huntonit Faspanel 3 board White and brush painted Single panel ceiling

ELEGANCE WALL PANEL

PAINTED

Huntonit prepainted wall panel inspired by the original wall panels. Elegance is a modern version with straight lines and easy mounting.

Huntonit prepainted wall panel Elegance is delivered in Caffelatte og White, delicate and timeless colors to suit most interiors. The panel contains of 5 boards who along with the tounge provides 120 mm width. Delivered in 4 pack.

SKYGGE PROFILE




Elegance White	11 x 600/620 x 2390 mm	Art nr:
Elegance Caffelatte	11 x 600/620 x 2390 mm	Art nr:





*Colors
available in
Elegance*

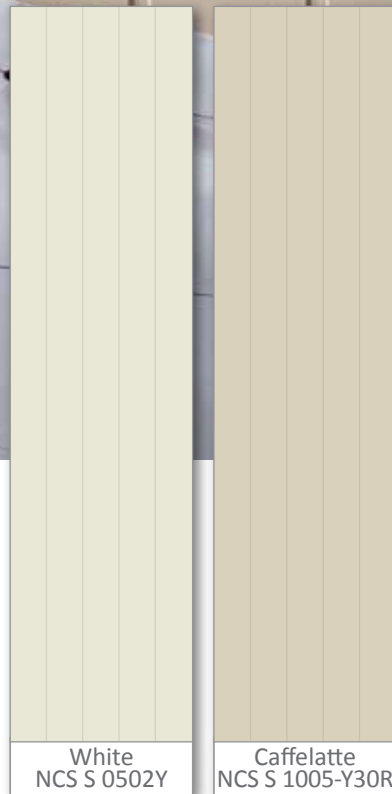

PAINTED ROYAL WALL PANEL

Huntonit prepainted wall panel Royal provides an elegant appearance of the original wall panels.

The panel contains of 5 boards who along with the tounge provides 120 mm width. Delivered in 4 pack.

PERLE PROFILE



Royal White
Royal Caffelatte

11 x 600/620 x 2390 mm
11 x 600/620 x 2390 mm

Art nr
Art nr




Huntonit wall panel Royal White and Symfoni ceiling




Huntonit wall panel Royal Caffelatte



*Colors
available
in Royal*

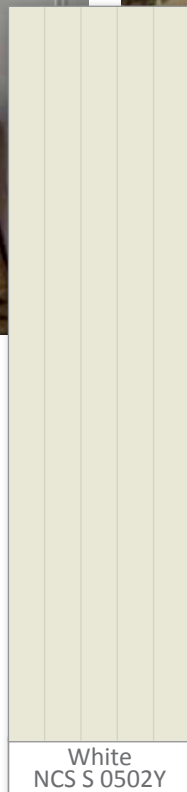

White
NCS S 0502Y

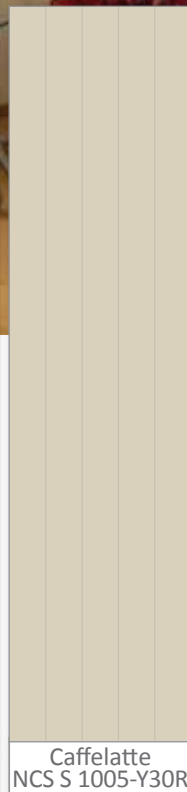

Caffelatte
NCS S 1005-Y30R

8 MM WALL PANEL BRUSH PAINTED

Mount with Casco Superfix or PL400 glue.
May be repainted with waterbased acrylic paint.
Acclimated the panels in room temp before assembly.

Skygge White 8 x 600/620 x 2390 mm Art.nr.203010



5 bord Skygge

6 MM WALL PANEL BRUSH UNPAINTED

Mount with Casco Superfix or PL400 glue.
Paint with waterbased acrylic paint. Acclimated the
panels in room temp before assembly.

6 bord Perlestaff unpainted 6 x 600/620 x 2390 mm Art.nr. 201010
Faspanel 8 bord unpainted 6 x 600/620 x 2390 mm Art.nr. 201020



6 bord Perlestaff



Faspanel 8 bord



Huntonit brush painted 8 mm 5 bord Skygge White



EASY AS 1-2-3

PANEL FOR RENOVATION

Light and convenient panel to renew your walls in no time

- easy and quick installation makes redecorating a breeze.

Huntonit panel for renovation is delivered in 2 versions:

6 mm unpainted and 8 mm brush painted.



step 1

Huntonit panel for renovation must be mounted onto existing wall and may be mounted directly against the moldings due to the thickness of the panel.

The panels is cut to size and adjusted to fit doors and windows.



step 2

Apply glue horizontally, CC 40cm, to the backside of the panel. Adapted the thickness of the glue to irregularities in the existing wall.



step 3

Press the panel firmly against the existing wall so the adhesive is distributed. After 10 minutes; check that the panel are attached evenly to the existing wall.

Mount the panel 0.5 cm from existing moldings.



step 4

Grout the transition between molding and panel.

Paint the unpainted panel with waterbased acrylic paint.



ANTIKK CEILING

Huntonit prepainted ceiling, type Antikk, has a completely smooth surface without profiles or structure. V-groove between each panel.

The ceiling panel are mounted across or parallel onto joist. When renovating nail the panels directly on the existing ceiling as long as this gives sufficient attachment. Delivered in 4 pack.

Huntonit prepainted ceiling contains of the same material as Huntonit wall panel.

Down lights may be installed in all our ceiling panels. Huntonit ceiling are adapted for mounting in dry and wetroom provided that the ceiling height is normal and the ventilation is good.

Antikk ceiling White 11 x 600/620 x 1200/1220 mm Art nr 231301



White
NCS S 0502Y



PRIMED
STANDARD
WALL PANEL

Huntonit primed wall panel consist of a smooth surface without profile or groves.

V-joint between the panels. Best suited as a base for wall paper or paint.

Vegg Standard primed White 11 x 1200/1220 x 2390 mm Art nr 233601
Vegg Standard primed White 11 x 1200/1220 x 2740 mm Art nr 233602







PAINTED BRANNIT

Fire retardant ceiling and wall panel.
Huntonit Brannit er utviklet for å imøtekomme
Brannforskriftene, Del 3 Brannvern.
Tested by SINTEF - Norways Fire Research
laboratory testify that Huntonit Brannit meets
the requirements for level K10 - B-s1,d0 -
according NS-EN 13986-2004.

Huntonit Brannit prepainted panels provides
shorter construction times and improved overall
economy. Huntonit Brannit wall- and ceiling
panel are easy to work with and has a tongue and
groove on two sides. Ceiling are delivered with
tongue and groove on all four sides. The panels
are treated with flame retardants paint.
Delivered in 4 pack.

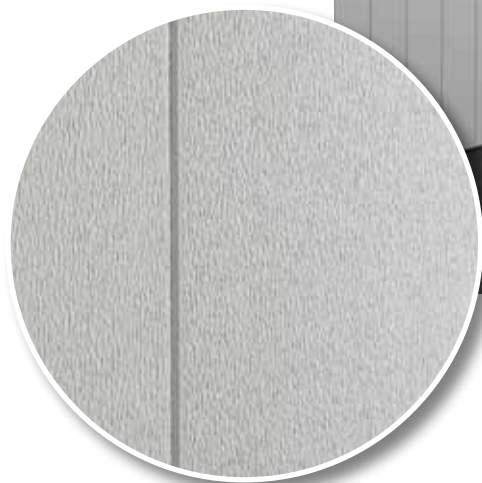

*En ting er brennsikkert -
Brannit er brannsikkert*

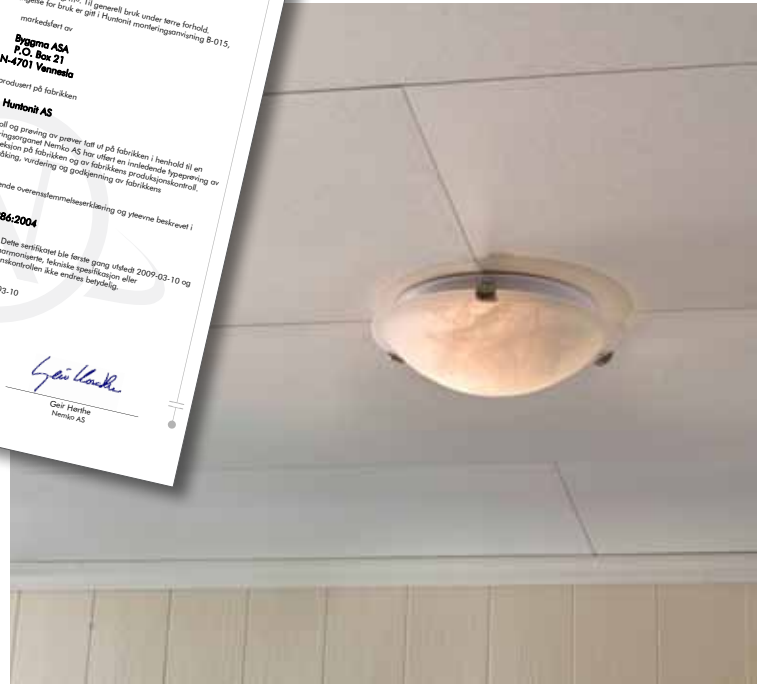

Brannit ceiling White 11 x 600/620 x 1200/1220 mm Art nr: 233041
 Brannit Wall White 11 x 600/620 x 2390 mm Art nr: 233001
 Brannit Wall White* 11 x 600/620 x 2740 mm Art nr: 233011
 * must be ordered

MAINTENANCE

To maintain fire classification B-s1,d0, repaint Huntonit Brannit panel with Palett. Palett Paint may be obtained in all NCS codes and gives great freedom of choice when it comes to renovation and maintenance of the installed Huntonit Brannit panel. Palett maintenance system is tested by SINTEF. Contact us for further information.



HUNTONIT TEXTURE

Ceiling- and wall panel inspired by nature. Visual surface with tangible texture which gives the wall character and personality.



ASTMA- OG
ALLERGIFORBUNDET
- gjør Norge friskere





VINTAGE COLLECTION
CONCRETE WALL

Wall panel with visual and tangible concrete surface.

Concrete has no profile, but a small V-groove between the panels.

Huntonit Vintage Wall Concrete Glazed Gray 11 x 600/620 x 2390 mm Art nr 241941

Concrete
Glazed gray



VINTAGE COLLECTION
VINTAGE WALL

Whitewashed wall panel with wood textured surface. Light, pure and natural surface.

V-FAS PROFILE



Huntonit Vintage Wall Faspanel 8 bord Whitewashed

11 x 600/620 x 2390 mm

Art nr 241714

Faspanel 8 bord
Whitewashed

Wood Wall Glazed Frappe. Left: Walls4You Textile Stripes from Forestia



VINTAGE COLLECTION WOOD WALL LASERT

Wallpanel with 5 board faspanel with brush painted and wood textured surface that appears through the glazed color.
For walls with a vibrant look.

V-FAS PROFILE



Huntonit Wood Glazed brush painted Frappe	11 x 600/620 x 2390 mm	Art nr: 231671
Huntonit Wood Glazed brush painted Cappuccino	11 x 600/620 x 2390 mm	Art nr: 231673
Huntonit Wood Glazed brush painted Mocca	11 x 600/620 x 2390 mm	Art nr: 231675

Wood Wall Glazed Cappuccino



Wood Wall Glazed Mocca






Cottage Wall Sawcut, White and Huntonit Design Waterside*



Cottage Wall Sawcut, White

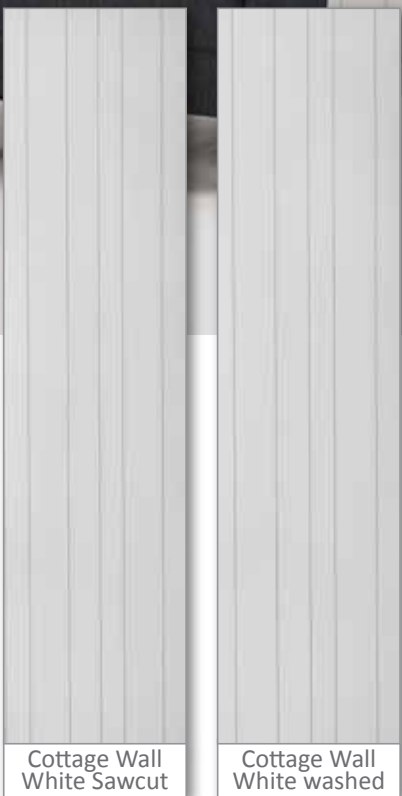

Cottage Wall
White Sawcut

Cottage Wall
White washed

Cottage Wall Sawcut White and Vintage ceiling Glazed Cortado



VINTAGE COLLECTION COTTAGE WALL

Two unike wall panel equipped with milled board in different sizes for a unique look.

SAW BLADE PROFILE



Huntonit Cottage Wall White Sawcut	11 x 600/620 x 2390 mm	Art nr: 241931
Huntonit Cottage Wall White washed	11 x 600/620 x 2390 mm	Art nr: 241714

* see brochure for Huntonit Design.

Wood Wall 5 bord faspanel Sand



Wood Wall 5 bord faspanel Mist og White



WOOD COLLECTION **WOOD WALL**

Wood Wall 5 bord faspanel with wood structure and bruch painted surface delivered in 3 colors.

Light and mood rewarding panel with simple installation and secure fixing for shelves and other interior.

V-FAS PROFILE



Huntonit Cottage Wall 5 bord faspanel White	11 x 600/620 x 2390 mm	Art nr: 241631
Huntonit Cottage Wall 5 bord faspanel Sand	11 x 600/620 x 2390 mm	Art nr: 241633
Huntonit Cottage Wall 5 bord faspanel Mist	11 x 600/620 x 2390 mm	Art nr: 241635



Wood Wall 5 bord faspanel Mist



*Colors available
in Wood Wall
5 bord fas*

Wood Wall
White S 0502 Y

Wood Wall
Sand S 2502 Y

Wood Wall
Mist S 3000 N

Wood Single panel White



Wood Single panel Skygge installed on wall and Mist in the ceiling



WOOD SINGLE PANEL

Single panel board with brush painted surface and wood sturcture. The panel may be used hlyrsontally or vertically onto ceiling or the wall. Short side extension with V-fas provides a clean appearance where panels need to be spliced for maximum coverage beyond 2400mm.

LONG SIDE EXTENSION IN SKYGGE PROFILE



Huntonit Wood Panelbord kostemalt White	(netto:11x180x2400) 11x200x2420 mm	Art nr: 231521
Huntonit Wood Panelbord kostemalt Sand	(netto:11x180x2400) 11x200x2420 mm	Art nr: 231522
Huntonit Wood Panelbord kostemalt Earth	(netto:11x180x2400) 11x200x2420 mm	Art nr: 231523
Huntonit Wood Panelbord kostemalt Mist	(netto:11x180x2400) 11x200x2420 mm	Art nr: 231524
Huntonit Wood Panelbord kostemalt Shadow	(netto:11x180x2400) 11x200x2420 mm	Art nr: 231525

Wood Single panel Sand installed onto wall and White onto ceiling



Ceiling: Wood Single panel Earth. Wall: Cottage Wall Sawcut White.



*Colors available
Wood Single
panel board*



Wood Ceiling Cortado and Cottage Wall White washed



Wood Ceiling Cortado



Wood Ceiling Frappe and Cottage Wall White washed wall



VINTAGE

WOOD CEILING LASERT

Ceiling panel with distinct wood structure and glazed colors. Deep color and character gives the ceiling compelling design.

LONG AND SHORT SIDE
EXTENSION IN V-FAS PROFILE



Frappe

Cortado

Huntonit Vintage Wood Ceiling brush painted Frappe
Huntonit Vintage Wood Ceiling brush painted Cortado

11 x 280/300 x 1820 mm
11 x 280/300 x 1820 mm

Art nr: 231512
Art nr: 231513

PAINTED CEILING PANEL

LONG AND SHORT SIDE
EXTENSION IN V-FAS PROFILE



Symfoni painted	11 x 280/300 x 1820 mm	Art nr: 231511
Symfoni painted	11 x 280/300 x 1220 mm	Art nr: 231501
Plankett painted	11 x 280/300 x 1820 mm	Art nr: 231408
Plankett painted	11 x 280/300 x 1220 mm	Art nr: 231406
Classique painted	11 x 280/300 x 1820 mm	Art nr: 231101
Classique painted	11 x 280/300 x 1220 mm	Art nr: 231201
Classique painted	11 x 620 x 1220 mm	Art nr: 231001



Ceiling: Huntonit Symfoni White



Ceiling: Huntonit Plankett White. Wall: Perle White



White Symfoni



White Plankett



White Classique

Available surfaces

WALL AND CEILING ACCESSORIES

Huntonit pre-painted wall- and ceiling are supplied with tongue and groove for quick installation and hidden nailing gives a assured result. Mount on existing wall or directly onto stud
Huntonit pre-painted wall- and roofpanel are the only pre-

Painted product recommended by the Norwegian Asthma and Allergy Association. Huntonit panels are also approved with Indoor Climate Award from the Danish Technological Institute.



CORNER CLIPS ACRYL FILLER CORRECTION PAINT



Use this corner clipp when mounting our panel and avoid visible staples in the corners. NB! Only on wooden studs, use 3 pieces. per panel.



For sealing internal corners. 1 tube is enough for approx. 20 lm joint 3 x 3 mm. Available in different colors.



Correction paint delivered in 20 ml to cover marks made by screws and nails. Available in different colors.

SPECIAL PROFILE EXT CORNER PROFILE INT CORNER PROFILE



Lists for use on windows and doors where a second board layer are mouted (renovation). Available in primed white.



For use in external corners. Length: 2700 x 28 x 28 mm. Available in different colors.



For internal corners. Length: 2700 x 12 x 12 mm. Available in different colors.

PAINTS FOR MOLDINGS JOINT KIT SCREWS



1/2 liter paint delivered in different colors to match the color of our panels.



When grouting corners we offer a joint set that is perfect for this purpose.



Adapted to 11 mm pre-painted panel. Wall: 4,2 x 35 mm. Ceiling: 4,2 x 25 mm.


OTHER INSTALLATION TIPS



In the inside corner the last panel may be attach to the stud with construction adhesive. If so you do not need clips or nailing. If last panel is installed against an outer wall with plastic wrap, one can not use adhesive. The panels may also be glued to brick/concrete. (see our installation instructions).



In buildings where there high demands on cleaning, eg. public buildings, institutions, etc., a base profile may be used to protect the edge of the panel. This solution is used when the panels need to be lifted off the floor (ex. 50mm.).



Huntonit pre-painted wall- and ceiling panel are equipped with tongue and groove for quick and easy installation with concealed nailing. The joints shall be glued. Spikeravstand 150 mm.

EXAMPLES OF HAZARD AND FIRE CLASSES

Veiledning til teknisk forskrift: § 7-22.

Definisjoner: B – s1, d0 : Brannit

D – s2,d0: Standard 11mm Huntonit

Type of building	No. etg	Fire class	Hazard class	Requirements for inner surface	Requirements for cladding	Requirements for surface inside escape route
Residential	1	BKL 1	4	D-s2,d0	K 10	B-s1,d0
Omsorgsbolig	1 - 2 3 og 4	BKL 1 BKL 2	6 6	B-s1,d0 B-s1,d0	A2-s1, do	B-s1,d0 B-s1,d0


Type	mm thick	Flatemasse kg/m ²	E-modul MPa . 103
Plasterboard	13	10	3,2 - 3,7
Fiboerboard	11	9,2	2,0 - 2,5
Chipboard	12	8	2,0 - 2,5
Plaster-/chipboard	10/12	12/14	3,2 - 4,5
Other types	10 - 13	> 8	< 4

Construction Details: 524.321


Table 351 Recommended sound diminishing panels. Please note that some traditional materials (eg. Plasterboard) may have differing characteristics in relation to what is stated here.

PREPAINTED CEILING

MOUNTING INSTRUCTIONS

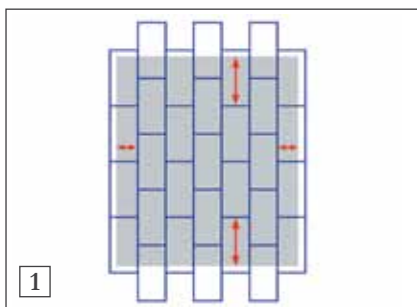

1) Platene må akklimatiseres 2 døgn i emballasjen i romtemperatur, og monteres umiddelbart etter at pakken er åpnet. En målsatt tegning lages før montering for beregning av forbruk av takplater.

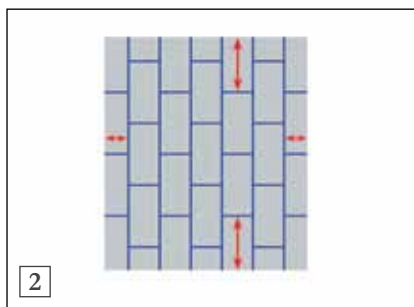

2) Prinsippet for tegningen viser også hvordan man får den beste løsningen av mønster på taket og hvordan platene må tilpasses før montering. Det bør holdes en avstand mot vegger og faste punkter på 7-10 mm.



3) Montering skjer vanligvis på langsgående elektrikerlektre med avstand c/c 60 cm. Alle frie platekanter skal understøttes. Ved montering av smalere takplater, må lekkeavstanden justeres slik at de passer til bredden av takplatene.



4) 1. plate i 1. platerad tilskjæres iflg. tidligere tegning, og ved skjæring med sirkelsag skal den malte siden vende ned.



5) 1. platerad monteres etter snor. Spikeravstand er c/c 150 mm. NB: platene monteres 10mm fra alle vegger.





6) For å unngå skader på platen utføres siste spikerslag med dor. Kramper og skruer kan også benyttes på platen.



7) Skjøtene skal ikke limes. Spikeravstand er c/c 150 mm. For å unngå skader på platen utføres siste spikerslag med dor. Kramper og skruer kan også benyttes (se mont.veil. M005-08-04).




8) For å finne lengden på 1. plate i 2. platerad tar man lengden på 1. plate i 1. platerad minus 60 cm.

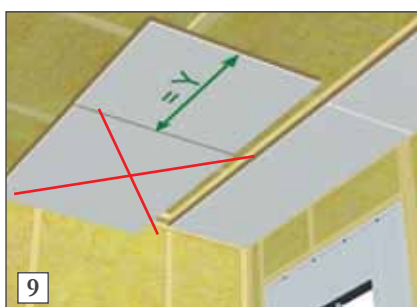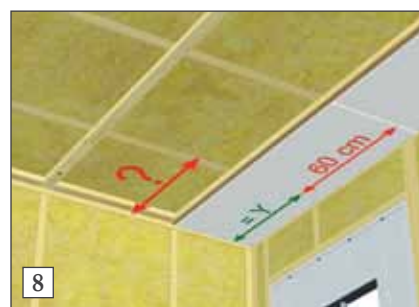

9) Dette måles og merkes av på den 1. platen i 2. platerad. Den overskytende delen skjæres av. Ved skjæring med sirkelsag skal den malte siden vende ned.



10) Resten av plateradene monteres på samme måte, og taket er ferdig.

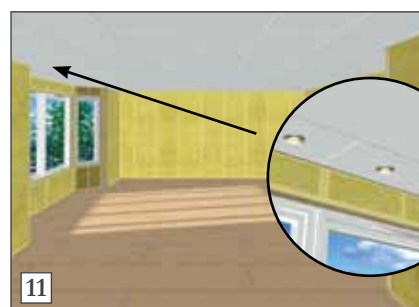

11) Takplatene er tilpasset bruk av down lights. Stil og muligheter er mange med utvalget av strukturer og dimensjoner. Med Huntonit ferdigmalte takplater har du mange muligheter til å få et flott tak. (Vedr. down-lights, se NBI 543.615).

MOUNTING INSTRUCTIONS



1

1) Platene må akklimatiseres 2 døgn i emballasjen i romtemperatur, og monteres umiddelbart etter at pakken er åpnet. På langsgående leker/stolper maks. c/c 600 mm. Kan også monteres på horisontale spikerslag, med maks. avstand 600 mm c/c. Ved montering på horisontale spikerslag spikres/skrues platene med 2 stk. fester per spikerslag.




2

2) 1. plate skjæres til. Ved skjæring med sirkelsag skal den malte siden vende ned.



3

3) Bruk vater slik at platene blir montert rett.

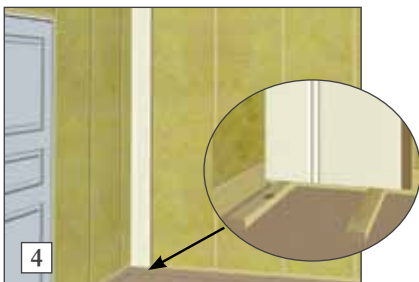


4

4) Platene monteres 10 mm fra gulv/tak – plasser gjerne 2 klosser under veggplaten for å lette monteringen.




5

5) Spikeravstand er c/c 150 mm. For å unngå skader på platen utføres siste spikerslag med dor. I hjørnet blir åpen spikring i platen skjult av siste plate som monteres. Kramper og skruer kan også benyttes.

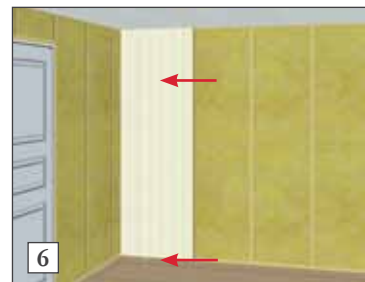

6

6) Skjøtene skal ikke limes. Neste plate settes på plass. Veggplatene leveres med not, fjær og v-fuge for skjult spikring.

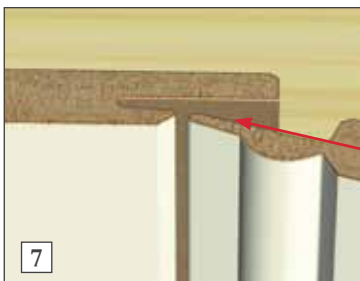


7

7) Fjærsiden på platen føres inn i noten.



8

8) Dette gir en skjult skjøt som ikke trenger å limes.

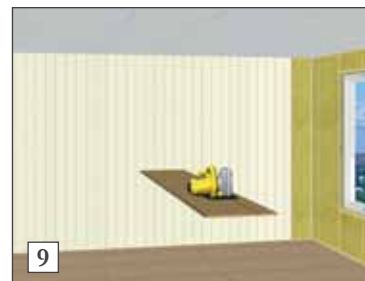


9

9) Siste plate mot neste hjørne skjæres til. Ved skjæring med sirkelsag skal den malte siden vende ned.



10

10) Siste plate mot neste hjørne skjæres til. Platen spikres åpent i hjørnet. Dette blir skjult av 1. plate på neste vegg. Husk dor. Kramper og skruer kan også benyttes (se for øvrig mont.veil. M004-01-04).

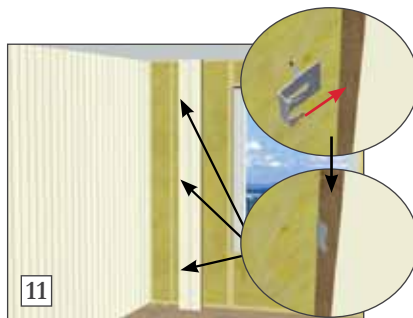

11


11) 1. plate i neste veggrekke skjæres til. Hjørne-klips benyttes for skjult spikring i innvendig hjørne. Slå hjørneklipsen helt inn i platen. Det benyttes 3 klips per platehøyde samt en spiker øverst og en spiker nederst i venstre hjørne i platen. Spikrene skjules av gulv- og taklist.



12

12) Platen plasseres tett inn i hjørnet og bankes på plass ved hver hjørneklips.

MOUNTING INSTRUCTIONS

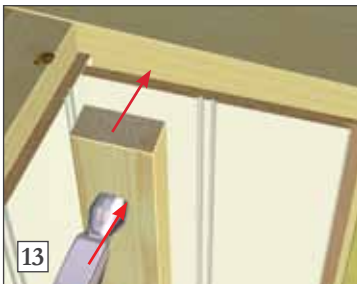

13) Bruk en lekte mellom hammeren og platen til å slå på.




14) Pass på at platen bankes helt inn.




15) Platen spikres så i spikerleppen. Inne i hjørnet spikres platen synlig med dykkstift (håndspikring). Bunn og topp kan spikres på vanlig måte. Man bruker flikkmalingen (i org.fargen) til å male hodene på de synlige dykkstiftene. Bruk kosten som sitter i korken på flikkmalingsflasken (se bildet under).



16) Resten av platene monteres på samme måten.

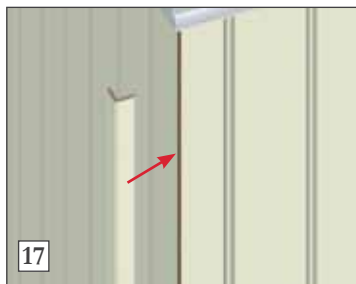

17) Ved utvendige hjørner benyttes hjørnelist.

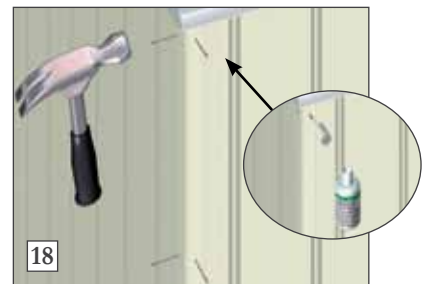


18) Denne stiftes på plass med avstand c/c 300 mm. Stiftene kan skjules med flikkmaling. Flikkmaling leveres i originalfarger for å skjule spiker og utbedre små skader i platene. Flikkemaling bør utføres svært forsiktig da overflatestrukturen blir forskjellig fra ferdigmalte struktur på platen.




19) Dette gir et perfekt, utvendig hjørne. Den utvendige hjørnelisten kan også limes på.



20) Vi kan levere Akryl Fugemasse i originalfarger til innvendige hjørner ved behov.

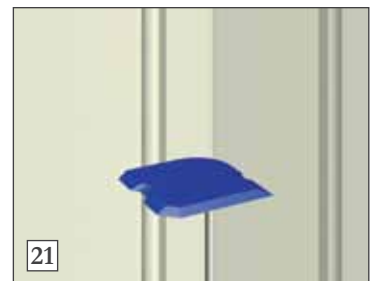

21) Vi kan også levere fugesett som gir deg en perfekt fuge i innvendige hjørner.

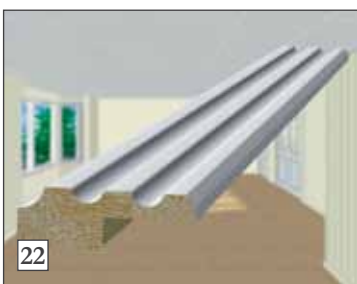

22) Vi kan tilby kombigerikt (foring/gerikt) til bruk rundt vinduer og dører, der det monteres et eks-tra platelag direkte på eksisterende plater/panel under oppussing.



23) Akrylmaling i 1/3 liter kan leveres i originalfarger til å male lister i samme farge som platene.



24) Platene leveres i mange typer og farger, og med tilbehør som gjør jobben enklere og resultatet mer profesjonelt. Med Huntonit MDF ferdigmalte veggplater har du mange muligheter for et spennende og stilrent interiør.



Byggma - for better living

0314, 15 000 Trykke Kai Hansen a.s



HUNTONIT

Huntonit AS
Postboks 21, 4701 Vennesla
Tlf. : 38 13 71 00
Faks: 38 13 71 01
e-post: byggma@byggma.no
www.huntonit.no



ASTMA- OG
ALLERGIFORBUNDET
— gjør Norge Friskere



Foto: Peder Austrud